




**FXAA** is BOPP film, non-heat sealable, one side flame treated with outstanding transparency, high tensile strength and low elongation. Designed particularly for acrylic adhesive tapes and no noise tape production.

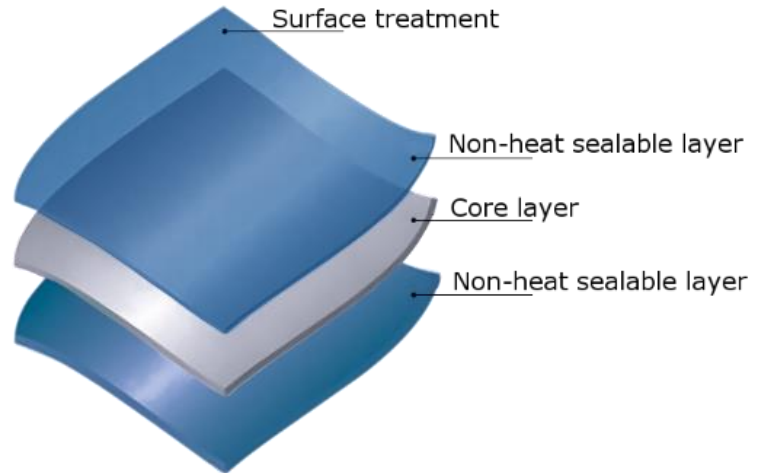

### TYPICAL APPLICATIONS

Adhesive tapes  
Lamination

Properties		Test Methods	Deviation	Typical Values						
		Internal method		23	24	25	27	28	30	32
Thickness $\mu\text{m}$										
Average thickness deviation, %			$\pm$	2.5	2.5	2.5	2	2	2	2
Yield, $\text{m}^2/\text{kg}$			$\pm 5\%$	48,5	45.8	44	40.8	39.2	36.6	34.4
Unit weight, $\text{g}/\text{m}^2$			$\pm 5\%$	20,9	21.8	22.7	24.5	25.5	27.3	29.1
Gloss (45°)		ASTM D 2457	$\pm 2$	90	90	90	90	90	90	90
Haze, %		ASTM D 1003	$\pm 0.2$	1.6	1.6	1.6	1.8	1.8	1.8	1.8
Coefficient of Friction*		ASTM D 1894	$\pm 0.1$	0.45	0.45	0.45	0.45	0.45	0.45	0.45
Shrinkage, % (120°C, 5 min)	MD	BMS TT 0.2		3.0	3.0	3.0	3.0	3.0	3.0	3.0
	TD			1.0	1.0	1.0	1.0	1.0	1.0	1.0
Elongation at break, %	MD	ASTM D 882	$\pm 20$	150	150	150	150	150	150	150
	TD			70	70	70	70	70	70	70
Tensile strength, MPa	MD	ASTM D 882	$\pm 20$	160	160	160	160	160	160	160
	TD			250	250	250	250	250	250	250
Surface treatment, dynes/cm		ASTM D 2578a		Min 42	Min 42	Min 42	Min 42	Min 42	Min 42	Min 42

\*-Dynamic COF, film/film, untreated/untreated side

The specified values are based on average results, measured by the manufacturer during standard production. They should not be considered as Data Sheet of any particular product.

The end user should be satisfied as to the suitability of the product for the intended application and the present regulatory regime. Therefore, Plastchim-T AD disclaims any liability for damages arising from the non-suitability of the product for the effected application.



### INDICATION OF TREATED SURFACE

FXAA is usually supplied with treated layer internally on the rolls, in case of other requirement this must be agreed with our sales representative before order processing.

### PACKING

	Core Diameter	Outer Diameter *	Notes
<b>Vertical</b>	152 mm (6')	≤ 550 mm	≤ 700 mm – two or more rows > 700 mm – one row
	76 mm (3')		
<b>Horizontal</b>	152 mm (6')	≤ 770 mm	
	76 mm (3')		

(\*) In case of no other requirements

### TOLERANCES

Weight tolerance, depending on the order volume	Width tolerance	Length tolerance
≤ 1 000 kg ± 20%	± 2 mm	±5 %
1001 ÷ 10 000 ± 10%		
>10 000 ± 5%		

### Storage and Transportation Terms & Conditions

Palletizing of goods is done according to customer's requirements.

The storage of all goods is in dry, covered and clean warehouses.

The transportation of the goods is carried out in dry, covered and clean means of transport.

The recommended temperature of storage/transportation is 10-30°C. If the temperature is not within the recommended limits, the following issues may occur:

- Decrease of dyne level
- Higher haze of the film
- Poor adhesion of the film surface that on a later stage could be an issue for laminating and printing
- Extremely low COF that can trouble further processing

Excessive humidity can be a reason for film blocking.

It is recommended that BOPP film should be tempered at operating room temperature for 24 hours before use.

Before printing or laminating of BOPP films it is recommended the use of an inline treatment station in order to boost the treatment level of the printable surface or to be used adequate primer to achieve a perfect product.

Adherence to the above mentioned storage and transport conditions ensures that the film is suitable to be used up to 6 months after production.

Claims regarding to the transportation are accepted within 1 week after the delivery date. If any, a record has to be taken in the CMR.